



VISUAL SHOWS THE ICDL4-GO DISPLAY

Integrale Chilled Display Deli

CHARACTERISTICS


- Fully enclosed chilled display deli for assisted service only.
- Gentle flow of convected air maintains pre-chilled food at a safe regulated temperature.
- The angle of the display deck can be adjusted for enhanced presentation.
- Illuminated superstructure.
- Rear preparation shelf with optional chopping board.
- Centre shelf for the display of ambient produce.
- Gantry mounted controller on operators side (GO) as standard.

SPECIFICATIONS

Stock Code	Capacity gn	Overall size mm	Weight kg	Wattage kw	List Price £
Integrale Chilled Deli					
ICDL2-GO	2/1	825 x 764 x 535h	103	1.7	£3502
ICDL3-GO	3/1	1175 x 764 x 535h	125	2.0	£3835
ICDL4-GO	4/1	1525 x 764 x 535h	153	2.2	£4038
ICDL5-GO	5/1	1875 x 764 x 535h	183	2.2	£4658
ICDL6-GO	6/1	2330 x 764 x 535h	197	2.5	£5175
Integrale Chilled Wide Deli					
ICWDL2-GO	2/1	825 x 914 x 535h	105	1.7	£3830
ICWDL3-GO	3/1	1175 x 914 x 535h	126	2.0	£4026
ICWDL4-GO	4/1	1525 x 914 x 535h	158	2.2	£4158
ICWDL5-GO	5/1	1875 x 914 x 535h	190	2.2	£4791

COUNTER CUT-OUT SIZES

Stock Code	Minimum cut-out size mm
ICDL2-GO	780 x 650
ICDL3-GO	1130 x 650
ICDL4-GO	1480 x 650
ICDL5-GO	1830 x 650
ICDL6-GO	2180 x 650
ICWDL2-GO	780 x 800
ICWDL3-GO	1130 x 800
ICWDL4-GO	1480 x 800
ICWDL5-GO	1830 x 800

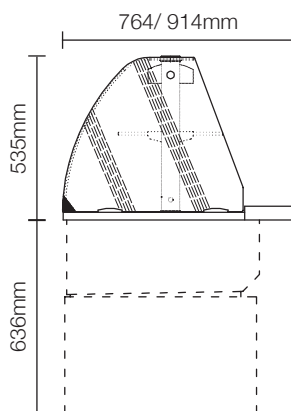

OPTIONAL EXTRAS

- Glass edge protection (per edge).
- Supply lead (length).
- Export packing case (recommended).
- Non standard airflow kit for condensing unit.

For more information on this product, please contact a member of our sales team or visit our website.